


CONTROL PUMP



BIPOLAR 32 A ON/OFF switch complete with FUSE

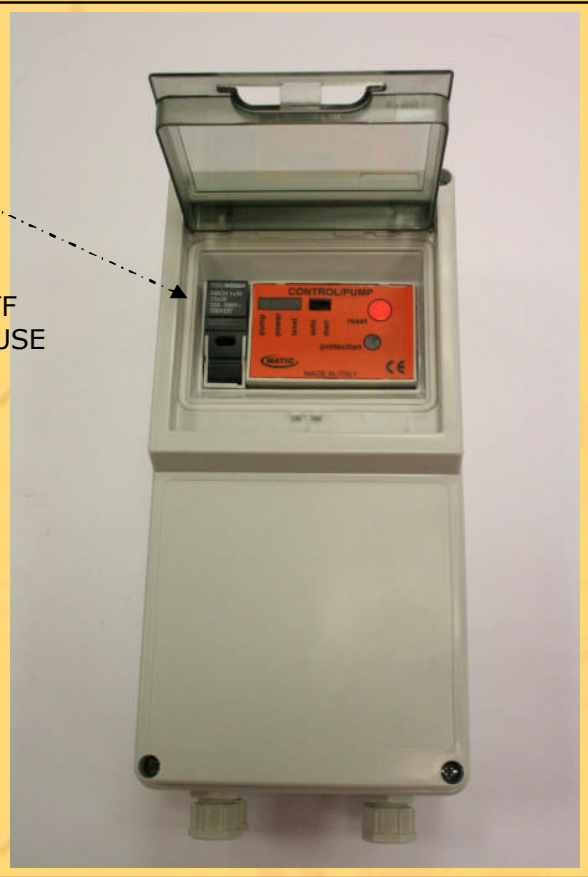

CONTROL/PUMP 2HP complete of:

- Box for capacitor
- Power supply 250V a.c. +/- 10%
- BIPOLAR 32 A ON/OFF switch complete of FUSE for power supply line protection
- AUTOMATIC/MANUAL switch
- Led signal: power supply – pump on – low water level
- Circuit braker with manual reset
- Powered output 250V a.c. for direct feeding of electro pumps motor up to a maximum load 2Hp 250V a.c. cosphi 0,4.
- 12V a.c. low tension output for the dry running control by means:
 - 3 single probes
 - 1 float switch for clear water
 - 2 submerged switches for sewage
- 12V a.c. low tension output for the connection to the pressure switch or float switch used for the electro pump command.
- Terminal board for:
 - n° 3 wires + ground for submedeg pumps
 - n° 2 wires for the capacitor
 - or 2 wires + ground for the pump

